

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 59229066
PUBLICATION DATE : 22-12-84


APPLICATION DATE : 09-06-83
APPLICATION NUMBER : 58104031

APPLICANT : SHIN MEIWA IND CO LTD;

INVENTOR : FUJITA KEIJI;

INT.CL. : F04B 15/02 E04G 21/04 F16K 11/087
F16K 25/00

TITLE : CONCRETE PUMP FLUSHING DEVICE

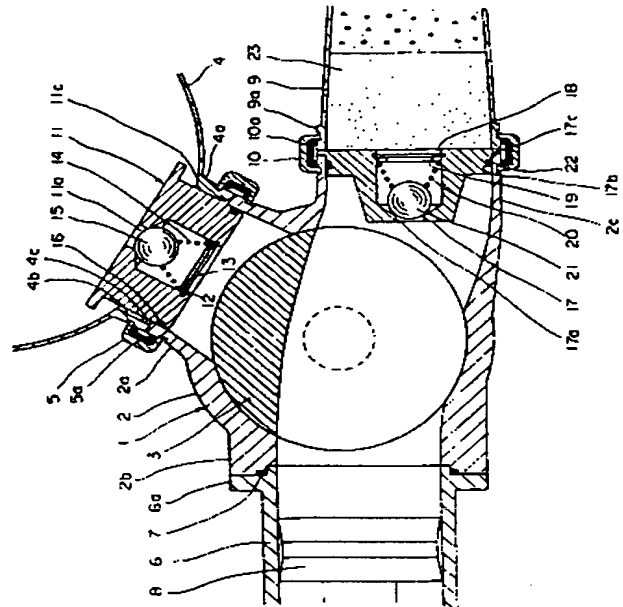

ABSTRACT : PURPOSE: To clean inside a discharge pipe easily by furnishing a check valve in the coupling part of a hopper with a selector valve.

CONSTITUTION: Discharge pipe 9 is removed to flush inside the hopper 4 and outer cylinder 6. An insert member 17 is set in an opening 2c, and sponge 23 is inserted in the discharge pipe 9, which is then coupled again by victaulic joint 10, and then the hopper 4 is filled with flush water to complete preparation. The water in the hopper 4 is sent to behind the sponge 23 through the outer cylinder 6 by means of changing-over of the normal selector valve position and expansive motion of a piston 8. Thus water flushing inside the discharge pipe 9 is performed.

COPYRIGHT: (C)1984,JPO&Japio